


MIRROR FILMS

MDN 500 ONE-WAY MIRROR

INFORMATION

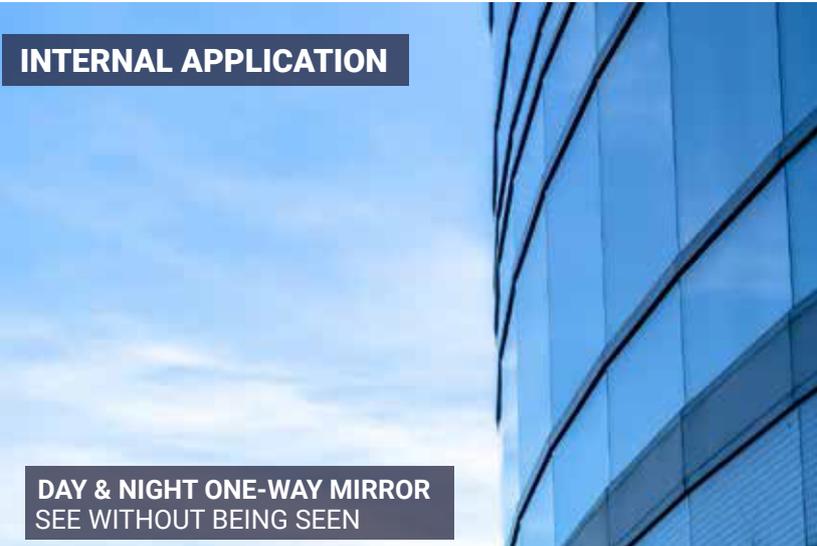

INTERNAL APPLICATION

DAY & NIGHT ONE-WAY MIRROR
SEE WITHOUT BEING SEEN

SUPPORT :	PET
ADHESIVE :	Acrylic polymer 25 gr/m2
PROTECTOR :	Siliconised PET 23 microns
THICKNESS :	60 microns
COLOUR :	Silver and black
APPLICATION SIDE :	External
UVA TRANSMISSION :	2%
T° OF APPLICATION :	min, + 5°C
STANDARDS :	EUROCLASSES
FIRE RATING :	B-s1, d0
GUARANTEE :	10 years interior*

*For glazing not exposed to the sun

DESCRIPTION

Effective day and night. Our one-way mirror, with its transparent black tint on the inside, protects you from prying eyes whatever the time of day or the light. From the outside, a perfect mirror. From the inside, total transparency with a black tinted effect. Allows 1% of visible light into the room.



-  **SUSTAINABILITY :** 10 years for vertical applications in Central Europe.
-  **USE :** For all types of glazing.
-  **MAINTENANCE :** After 30 days with a standard cleaning solution (non-abrasive, ammonia-free, etc.). Do not use cleaning products that could scratch the surface.
-  **STORAGE :** 2 years from delivery. This film should be stored away from excessive humidity and sunlight, at a temperature below 38°C.

In order to meet the highest standards, we recommend that you do not mix films from different productions.

DIMENSIONS

BY ROLL :



1,52 x 10 m
30 m


METHOD OF APPLICATION

The surface to be bonded must be free from dust, grease or any other contaminant. Some materials, such as polycarbonate, can cause bubbling problems. A compatibility test is therefore recommended. Can be installed on plexiglass and polycarbonate.

PRODUCTION AND STANDARDS

In order to constantly improve our products, we may modify colours and manufacturing processes without prior notice. Before applying our films, we recommend that users ensure that they are suitable for the intended use and comply with current standards.

OPERATION

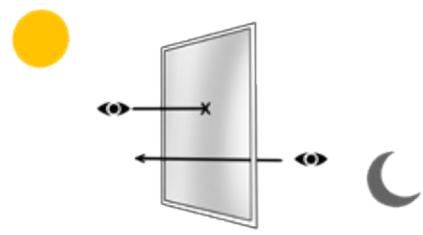

Application notes



SCAN ME

Video of the installation



SCAN ME