

**Highlights**

- Self-adhesive (B1 fire protection certified C - s2,d0)
- versatile usable
- repeat at approx. 1,0 - 1,5 m
- Available as roll, cut to size or by the meter
- Decor continuous across webs
- Suitable for walls and furniture

**Application**

**Possible substrates**

- Paint coat with glossy paint (optimal)
- Paint coat with matt paint (conditionally possible, Aqua Primer recommended)
- Composite panels
- Rigips
- rigid foam boards
- Glass
- Wood (not natural wood)
- Stone
- melamine surfaces

**Unsuitable substrates**

- Sandy substrates
- Walls with dents, cracks, scratches
- Paints with migrating ingredients such as chlorinated waxes and silicones
- Graffiti resistant paint
- Textured paints
- Woodchip wallpaper / textured wallpaper
- Latex paints on wood substrates
- Oily alkyd primers and enamel paints
- chalky, sandy, weathered painted surfaces
- paint coatings that are not completely dry

**Substrate must be clean and smooth:**

- free from grease, dust, dirt, oil
- Repair unevenness

**Processing temperature:**


- Room temperature 16-25 degrees optimal

**Installation:**

- Unroll the film, leave for 1 hour
- Clean substrate and especially edges with degrease
- Fix foil with masking tape and align foil
- Pull off cover foil from decorative foil piece by piece
- Rework edges with a lot of pressure & anneal

**Remove the foil:**

- Peel off slowly at 120-180 degree angle
- Use hot air dryer (except for sheetrock)

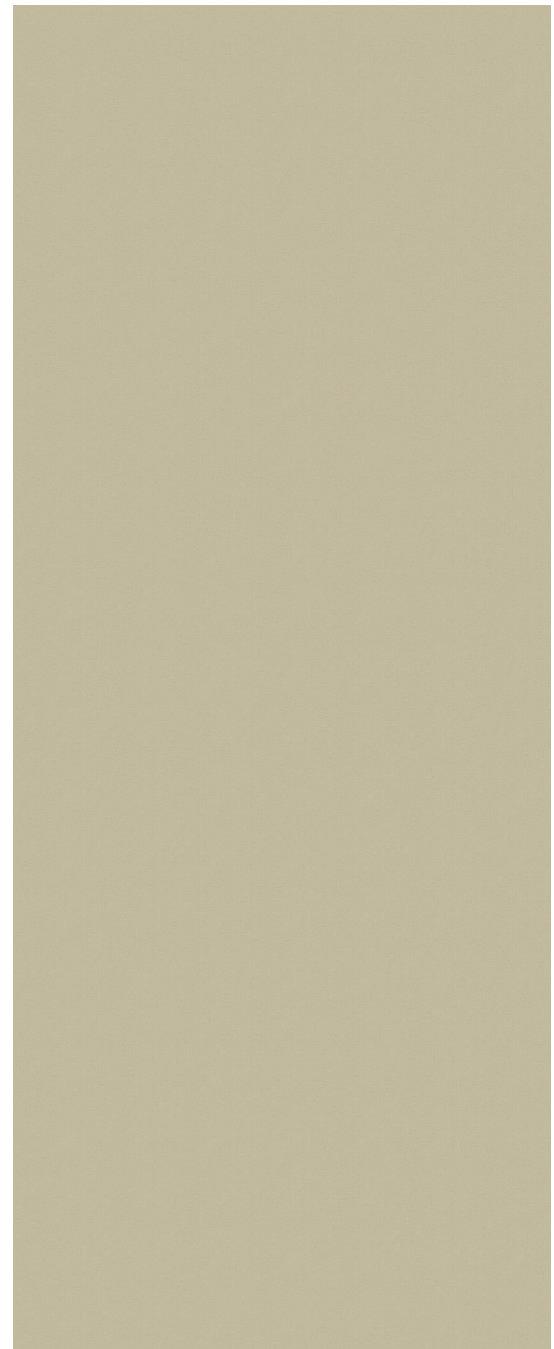

3,00 x 1,22 m

<b>Material:</b>	Polymer Calendered vinylfilm with adhesive
<b>Application:</b>	Indoor
<b>Material thickness with adhesive/weight:</b>	0,21 mm/318 g/m <sup>2</sup>
<b>Adhesive:</b>	Acrylic adhesive, structured adhesives with air release effekt
<b>Layer:</b>	PE/ Silicon/Paper
<b>Layer thickness/weight:</b>	0,18 mm/149 g/m <sup>2</sup>